Champion®

MOYER DIEBEL®

The Dishwashing and Glasswashing Machine Specialists

2005 Retail Price List

Add GST (Goods and Services Tax) as applicable

Effective September 1, 2005

	Page
Glasswashers	2
Undercounter Dishwashing Machines	4
Hood-Type Dishwashing Machines	6
Door-Type Dishwashing Machines	7
Rack Conveyor Dishwashing Machines	9
Upright Conveyor Dishwashing Machines	14
Pot, Pan and Utensil Warewashing Machines	17
Power Wash Sink Systems	20
Circular Dishwashing Machines	21
Tray Dryer	21
Waste Handling Systems	21

ORDERING INFORMATION
When ordering, please supply the following information: Direction of operation; Type of tank heat; Voltage, cycle and phase; Specials or options. All prices are Retail F.O.B. destination (Yukon and N.W.T. excepted). Terms are net 30 days from date of invoice. **All prices are subject to change without notice.** All orders are subject to approval and acceptance by factory. Prices do not include provincial or other taxes.

ALI GROUP FOODSERVICE EQUIPMENT

Glasswashers

Standard Features
- Three built-in dispensing pumps
- Electric tank heat
- 140°F wash
- Low-water tank heat protection
- Cool fresh water rinse – 75°F
- Stainless steel frame, wash and rinse chamber
- Polypropylene conveyor
- Built-in controls
- Glass activated on/off stop
- Upper and lower wash and rinse spray system
- Voltage 208-230/60/1 supplied as standard
- Plug in cord provided

	Approximate Shipping Wt. lbs./kg.	Retail Price (Add GST)
DF (Clockwise Rotation)	204/93	**$ 6,950**
DF-1 (Clockwise Rotation)	204/93	**6,950**
SW-400 (R-L), (L-R) specify direction	227/104	**10,565**
SW-600 (R-L), (L-R) specify direction	297/133	**11,045**

Options	P/N		
SW12 Stainless Steel Splash Guards for SW-400 (set of 2)	0708788		**$ 200**
SW24 Stainless Steel Splash Guards for SW-600 (set of 2)	0708789		**215**
SW48 Stainless Steel Back Panel for SW-400	0702882		**320**
SW72 Stainless Steel Back Panel for SW-600	0702886		**375**
Quick Disconnect Package (casters, piping, drain)	0707258	7/3	**1,075**
Kit 264 Wash Down Hose	0701956	4/1.8	**145**
Kit 332 Casters, set of 4; 2 locking, 2 regular	0701962	5/2.2	**735**
SW46C Hand Sink and Wet Waste Receiver with legs	0708453	54/25	**1,465**
DF-70A Drain Tray & Waste Collector	0707544	8/3.6	**300**
SW47 Drain Tray & Waste Collector	0706204	2/1	**145**

NOTE: Options prices apply only when ordered with the machine. (Otherwise add 10%)

Champion® MOYER DIEBEL®
The Dishwashing and Glasswashing Machine Specialists

Glasswashers

Standard Features
- Upper and lower stainless steel wash/rinse arms
- Stainless steel construction
- 90 second cycle
- On fill/Off drain switch
- Chemical prime switches
- Pumped drain
- Maintenance heater
- Three built-in chemical pumps
- Built-in flow regulator
- Two 16" x 16" square racks provided
  1 peg
  1 flat
  4 upper and 4 lower dividers to make glassrack
- 115/60/1, 5-ft. cord and plug supplied

Automatic Rack Glasswasher		Standard Voltages	Approximate Shipping Wt. lbs./kg.	Retail Price (Add GST)
MD 18-1	Single door rack glasswasher	115/60/1	150/68	**$ 5,790**
MD 18-2	Two door rack glasswasher	115/60/1	150/68	**6,295**
MD 18-1H	Single door rack glasswasher w/high hood	115/60/1	155/68	**6,295**

Options and Accessories

RS18-24	18" wide rack stand with 24" high drain board top				**1,060**
RS18-30	18" wide rack stand with 30" high drain board top				**1,175**
RS24-24	24" wide rack stand with 24" high drain board top				**1,245**
RS42-24	42" wide rack stand with 24" high drain board top				**1,890**
HS19-30	19" wide hand sink with scrap basket – 30" high				**1,530**
CS7-20	Chemical stand 20" long, 7" wide				**235**
Remote cycle switch			P/N 0709241		**295**
Racks	peg		P/N 110352		**65**
	flat		P/N 110353		**65**
Glass rack dividers		P/N 112141 lower	P/N 112142 upper	*each*	**10**
GR-1	Angled glass rack		P/N 112360		**115**
GR-2	Angled wire glass rack		P/N 112362		**115**
GR-3	Angled glass rack, 1/2 rack size		P/N 112361		**65**

Fill & Dump Undercounter Machines

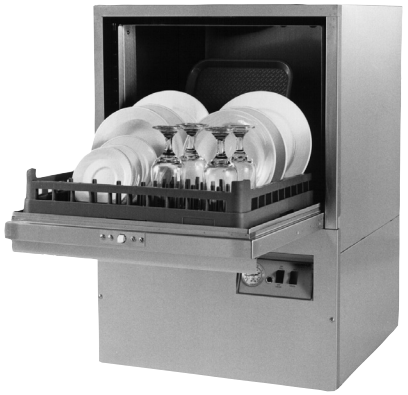

Standard Features

- Final rinse water always reused as next cycle's wash water
- Pumped rinse
- Upper and lower wash/rinse arms
- 21 racks per hour
- 140-second, fully automatic cycle
- Pumped drain
- 6-foot flexible fill hose
- 6-foot flexible drain hose
- Built-in flow regulator/line strainer
- 1/2-Hp wash pump motor
- Racks: 1 peg, 1 flat
- Tank maintenance heater (501HT, 501LT, 501HTN only)

★ ***Rinse Sentry*** *monitors the booster temperature and automatically extends the cycle time to ensure 180°F final rinse.*

		Standard Voltages	Shipping Wt. lbs./kg. (Approx.)	Retail Price (Add GST)
High Temperature				
501HT	High temperature with built-in booster **(40°F rise)** ★ ***Rinse Sentry,*** Detergent and Rinse-Aid pumps included	208-240/60/1	198/90	**$ 7,175**
401HT *Plus*	High temperature with built-in booster **(40°F rise)** ★ ***Rinse Sentry,*** Detergent & Rinse-Aid pumps included	208-240/60/1	178/179	**5,945**
501HTN	High temperature — **no booster** Detergent and Rinse Aid pumps included	115/60/1	180/82	**5,515**
Low Temperature				
501LT	Low temperature undercounter Detergent, Sanitizer and Rinse-Aid pumps included	115/60/1	173/79	**6,230**
401LT *Plus*	Low temperature undercounter Detergent, Sanitizer and Rinse-Aid pumps included	115/60/1	173/79	**4,735**

Options	**Part #**		
Kit 504, Top and sides	0708756	24/11	**460**
Kit 505, Top	0708744	9/4	**220**
Kit 506, Left side	0708745	9/4	**125**
Kit 507, Right side	0708746	9/4	**125**
Kit 511, Booster 70°F rise, ★ ***Rinse Sentry*** (401HT & 501HT)	0708753		**460**
17RS, 17" Rack Stand (401 & 501 Series only)	0708757	17/8	**500**
Kit 510, Extended pump drain	0708766	15/7	**715**
Racks, additional peg or flat (specify) each	101285 or 101273	7/3	**95**
Combination sink/table system with scrapping/soaking sink, lower cabinet (specify direction: sink right OR left of machine)	LH-404561 RH-404562	167/76	**2,660**
Overshelf for CST		10/4.5	**820**
Sprayhose for CST	100243 (B-0113)	15/7	**825**

NOTE: Options prices apply only when ordered with the machine. (Otherwise, add 10%)

Champion® MOYER DIEBEL®

The Dishwashing and Glasswashing Machine Specialists

Fresh Water Rinse Undercounter Machines

301HT

Standard Features

- Final rinse water replenishes wash tank water
- Top and side panels
- Detergent and Rinse-Aid pumps
- Line pressure rinse
- Upper and lower stainless steel wash and rinse arms
- Thermostatically controlled wash tank heater
- Pressure reducing valve
- Built-in booster provides 180°F/82°C final rinse water
- Pumped drain for drain connections up to 3' [1220mm] above the floor
- Flexible fill and drain hoses
- Top-mounted slide out controls
- Two 20" x 20" racks [508mm x 508mm]
- One year parts and labor warranty
- Fully automatic wash/rinse cycle process

★ ***Rinse Sentry*** *monitors the booster temperature and automatically extends the cycle time to ensure 180°F final rinse.*

		Standard Voltages	Shipping Wt. lbs./kg. (Approx.)	Retail Price (Add GST)
Single Phase				
301HT	High Temp., **40°F Rise** High temperature w/built-in Booster Detergent & Rinse-Aid pumps included ★ ***Rinse Sentry***	208-240/60/1	198 lbs.	**$ 5,130**
301HT	High Temp., **70°F Rise** High temperature w/built-in Booster, ★ ***Rinse Sentry*** Detergent & Rinse-Aid pumps included	208-240/60/1	198 lbs.	**5,590**
Three Phase				
301HT	High Temp., **40°F Rise** High temperature w/built-in Booster, ★ ***Rinse Sentry*** Detergent & Rinse-Aid pumps included	208-240/60/3	198 lbs.	**5,455**
301HT	High Temp., **70°F Rise** High temperature w/built-in Booster, ★ ***Rinse Sentry*** Detergent & Rinse-Aid pumps included	208-240/60/3	198 lbs.	**5,915**

Door/Hood-Type Dishwashing Machines

MD1000 Standard Features

- 1 HP pump motor
- Straight-through or corner application – simple conversion
- Fill and dump operation
- Rinse water always re-used for next cycle's wash
- Rinse Sentry ensures 180°F final rinse (HT only)
- Stainless steel front panel
- Racks: 1 peg and 1 flat, supplied

High Temperature		Standard Voltages	Retail Price (Add GST)
MD-1000HT	High Temperature Door-type with built-in booster **(40°F rise optional)**	208-240/60/**3**	**$ 8,000**
MD-1000HT	High Temperature Door-type with built-in booster **(40°F rise standard)**	208-240/60/**1**	**8,225**
MD-1000HT	High Temperature Door-type with built-in booster **(70°F rise optional)**	208-240/60/**3**	**8,225**
MD-1000LT	Low Temperature Door-type (Detergent, rinse-aid and sanitizer pumps included)	115/60/**3**	**6,575**

MH65 Standard Features

- High pressure 1.5 Hp pump motor
- Interchangeable upper and lower stainless steel wash and rinse arms
- Door activated or push-button cycle
- Built-in 40°F rise booster
- **★ Rinse Sentry ensures 180°F final rinse**
- Field convertible from straight-through to corner operation
- Automatic tank fill
- Single electrical connection
- Detergent/chemical connection provisions
- Stainless steel enclosure panels (front and sides)
- Racks: 1 peg and 1 flat rack supplied

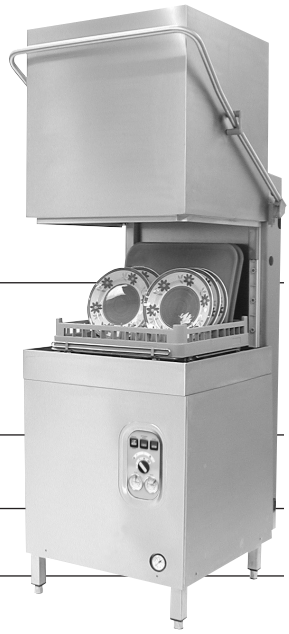

High Temperature		Standard Voltages	Retail Price (Add GST)
MH65 (M2)	Hood type with built-in booster **(40°F rise)** (Pressure regulating valve included)	208-240/60/**3**	**$ 9,035**
MH65 (M2)	Hood type with built-in booster **(40°F rise)** (Pressure regulating valve included)	208-240/60/**1**	**9,270**
MH65 (M2)	Hood type with built-in booster **(70°F rise)** (Pressure regulating valve included)	208-240/60/**3**	**9,270**

Champion®

MOYER DIEBEL®

The Dishwashing and Glasswashing Machine Specialists

Door-Type Dishwashing Machines

Standard Features

- Automatic tank fill
- Common utility connections
- Control circuit, 120-Volt
- Detergent/chemical connection provisions
- Door safety switch
- Automatic electric drain valve
- Enclosure panels (front and sides)
- Interchangeable upper and lower stainless steel arms
- Low-water tank heat cut-off
- Racks: 1 peg and 1 flat rack supplied
- Tank heat: electric, steam injector, steam coil, or hot water coil
- Total stainless steel construction

MDHB

		Standard Voltages	Approximate Shipping Wt. lbs./kg.	Retail Price (Add GST)
High Temperature				
MDHB (with built-in booster)		208-240/60/1		
	Electric 9 kW (40°F rise)	208-230/60/3	350/159	**$12,830**
	(Water pressure regulating valve included)	460/60/3; 575/60/3		
	Electric 18 kW (70°F rise)	208-230/60/3	350/159	**13,765**
	(Water pressure regulating valve included)	460/60/3; 575/60/3		
	Steam coil or Steam injector with	208-230/60/1		
	steam booster (40° – 70°F rise)	208-230/60/3	350/159	**17,170**
	(Water pressure regulating valve included)	460/60/3; 575/60/3		
For corner application (Model MDHB-C)			**Add**	**345**
MDH-1	Electric (no booster)	115/60/1 or	325/147	**11,450**
MDH-1	Steam injector or steam coil (no booster)	208-230/60/1 or		**12,600**
MDH-1-HWC	Hot water coil tank (no booster)	208-230/60/3 or		**13,145**
		460/60/3, 575/60/3		
For corner application (Model MDH-1C)			**Add**	**345**
Low Temperature				
MDLF	Low temperature	208-230/30/1 or		
	fresh water rinse	208-230/60/3 or	325/147	**11,115**
		460/60/3, 575/60/3		
For corner application (Model MDLF-C)			**Add**	**345**
Options				
Additional peg or flat racks (specify type) *each*				**95**
Steam pressure regulating valve (unmounted)				**795**
Water pressure regulating valve (unmounted) Standard on MDHB				**210**
Vent fan control switch				**205**

NOTE: Machine must be ordered as a straight-through or corner application

Door-Type Tall Dishwashing Machines

Standard Features

- Large 27" opening for trays, sheet pans or 60 quart mixing bowl
- Adjustable cycle selector
- Automatic tank fill
- Built-in stainless steel electric booster (D-HBT)
- Automatic electric drain valve
- Door activated cycle start
- Electric tank heat (3kW)
- Low-water tank heat protection
- 2-Hp drip-proof pump motor
- Door safety switch
- Interchangeable upper and lower spray arms
- Stainless steel enclosure panels (front and sides)
- Detergent/chemical connection provisions
- Water pressure regulating valve (mounted)
- Racks: 1 peg rack and 1 flat rack

MDHBT

High Hood		Standard Voltages	Approx. Shipping Wt. lbs./kg.	Suggested List Price
MD-HBT	40°F Electric (with booster)	208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3	365/166	**$ 19,995**
	70°F Electric (with booster)	208/60/3; 240/60/3; 480/60/3; 575/60/3	365/166	**21,175**
	Steam coil or Steam injector with Steam Booster (40°F – 70°F rise)	208/60/1; 240/60/1; 208/60/3 240/60/3; 480/60/3; 575/60/3	365/166	**22,585**
For corner application (Model MD-HBTC)			**Add**	**345**
MD-H1T	Electric (no booster)	208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3	340/154	**18,420**
	Steam coil or Steam injector (no booster)	208/60/1; 240/60/1; 208/60/3 240/60/3; 480/60/3; 575/60/3	340/154	**18,525**
For corner application (Model MD-H1TC)			**Add**	**345**

Options

Sheet pan rack	**330**
Vent fan control switch	**205**

Specifications and terms will be those in effect at the time of shipment and prices are subject to change without notice. Standard Champion Moyer Diebel Warranty, Terms and Conditions of Sale apply.
NOTE: Machine must be ordered as a straight through or corner application.

Champion® MOYER DIEBEL®
The Dishwashing and Glasswashing Machine Specialists

Rack Conveyors

E-SERIES

DualRinse

Standard Features

- ***Exclusive Dual Rinse Technology*** – Lowest water consumption in its class! Only 0.45 imp. gal. per rack water usage.
- Machine only consumes 93,3 imp. gals./hour of fresh water yet wares are rinsed with over 250 imp. gals./hour
- Low water usage means energy savings! Only 12kW booster for 40 degree rise; 22kW for 70 degree rise
- Wide 26" doors, provide easy access for cleaning – large 20-3/4" internal vertical clearance
- Single piece stainless steel upper/lower spray arm assemblies – easily removable
- All wash manifolds at back of machine – no internal piping which facilitates cleanup
- Racks: 2 dish racks & 1 silver rack
- Stainless steel pump housings and impellers
- Stainless steel splash shields
- Single electrical connection for machine and booster

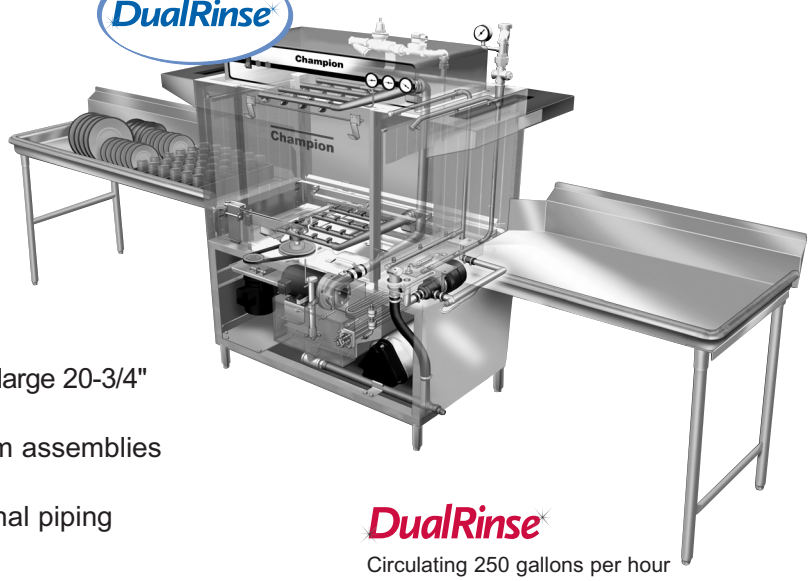

DualRinse
Circulating 250 gallons per hour with only 93 gallons actual fresh water consumption

E-Series	Length Between Tables	Approximate Shipping Wt.	Suggested List Price
Model 44DR (E-Series, 44" single tank, dual rinse)	44"	600 lbs.	**P.O.R.**
Model 44DRWS (E-Series, 44" single tank, water saver dual rinse)	44"	600 lbs.	**P.O.R.**
Model 44 DRHWC (E-Series, hot water coil, dual rinse)	44"	600 lbs.	**P.O.R.**
Model 66 DRHWC (E-Series, hot water coil, prewash, dual rinse)	66"	700 lbs.	**P.O.R.**
Model 66 DRPW (E-Series, 44 with 22" prewash, dual rinse)	66"	700 lbs.	**P.O.R.**
Model 66 DRWSPW (E-Series, 44 WS with 22" prewash, dual rinse)	66"	700 lbs.	**P.O.R.**
Model 80 DRHDPW (E-Series, 44 with 36" prewash, dual rinse)	80"	700 lbs.	**P.O.R.**

Tank Heat (specify one)

Electric with thermostat and low-water cutoff	**Standard – No Charge**
SST closed steam coil or injector with thermostat and low-water cutoff	
Single tank	**P.O.R.**
For recirculated hot water coil heat (HWC)	**P.O.R.**
For low pressure steam coil (10-14 PSI)	**P.O.R.**

Booster Heaters (Shipping Weight: 150 lbs.) All prices reflect mounted and piped boosters

Dual Rinse Electric 44 Series Models	40°F rise only (12 kW)	**P.O.R.**
	70°F rise (22 kW)	**P.O.R.**
Dual Rinse Electric Water Saver Models	40°F rise (10 kW)	**P.O.R.**
	70°F rise (16 kW)	**P.O.R.**
Dual Rinse Steam	40°F rise	**P.O.R.**
	70°F rise	**P.O.R.**

Above models available in any of the following voltages: 208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3.
*When ordering, please specify the direction of operation, voltage and phase.
NOTE: P.O.R. – Price on Request

Rack Conveyors

E-SERIES

Standard Features

- Wide 26" and 15-1/2" doors (prewash models) provide easy access for cleaning – large 20-3/4" internal vertical clearance
- Single piece stainless steel upper/lower spray arm assemblies – easily removable
- All wash manifolds at back of machine – no internal piping which facilitates cleanup
- Racks: 2 dish racks & 1 silver rack
- Standard upper and lower prewash spray arm assemblies (prewash models)
- Stainless steel pump housings and impellers
- Stainless steel splash shields
- Low water usage means energy savings! Only 27 kW for 40 degree rise, 36 kW for 60 degree rise and 48 kW for 70 degree rise
- Sloped internal surfaces for efficient water return to wash tank

Model 44 Shown with optional vent cowls

E-Series	Length Between Tables	Approximate Shipping Wt.	Suggested List Price
Model 64 (E-Series, 64" two tank)	64"	865 lbs.	**P.O.R.**
Model 86 PW (E-Series, 64" two tank with 22" prewash)	86"	1055 lbs.	**P.O.R.**
Model 100 HD PW (E-Series, 64" two tank with 36" prewash, heavy duty)	100"	1265 lbs.	**P.O.R.**
Model 84 (E-Series, 84" two tank)	84"	865 lbs.	**P.O.R.**
Model 106 PW (E-Series, 84" two tank with 22" prewash)	106"	1015 lbs.	**P.O.R.**
Model 120 HD PW (E-Series, 84" two tank with 36" prewash, heavy duty)	120"	1265 lbs.	**P.O.R.**

Tank Heat (specify one)

Electric with thermostat and low-water cutoff	**Standard – No Charge**
SST closed steam coil or injector with thermostat and low-water cutoff	
For recirculated hot water coil tank heat (HWC)	**P.O.R.**
Two tank (E-Series, 64 and 84 Series)	**P.O.R.**
For low pressure steam coil (10-14 PSI)	**P.O.R.**

Booster Heaters (Shipping Weight: 150 lbs.) All prices reflect mounted and piped boosters

E-Series Electric 64 & 84 Series Models	40°F rise only (27 kW)	**P.O.R.**
	60°F rise (36 kW)	**P.O.R.**
	70°F rise (48 kW) (Externally mounted with cover)	**P.O.R.**
E-Series Steam	40°F rise	**P.O.R.**
	70°F rise	**P.O.R.**

Above models available in any of the following voltages: 208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3.
*When ordering, please specify the direction of operation, voltage and phase.
NOTE: P.O.R. – Price on Request

Champion®

MOYER DIEBEL®

The Dishwashing and Glasswashing Machine Specialists

KB Series Rack Conveyors

Standard Features

- Automatic tank fill
- Common utility connections
- Control circuit, 120-Volt
- Door safety switch
- Door-activated drain closure
- Stainless steel enclosure panels
- Energy Sentinel (idle pump shut-off)
- Rinse saver device
- Vent fan control
- Separate 1/4-Hp conveyor drive motor
- Splash-proof top-mounted controls
- Electric tank heat (with low water tank heat cut-off)
- Total stainless steel construction
- 1-Hp prewash pump motor
- 2-Hp wash/rinse pump motors
- Racks: 2 peg racks and 1 flat rack

*High Temperature	Length Between Tables	Approximate Shipping Wt.	Suggested List Price
44 Modular Series (Corner Application)			**P.O.R.**
54-KB (54" single tank/final rinse)	54"	625 lbs.	**P.O.R.**
54-KPRB (54-KB with 22" prewash)	76"	875 lbs.	**P.O.R.**
64 Modular Series (Corner Application)			**P.O.R.**
***Low Temperature**			
KL-44 (44" single tank)	44"	600 lbs.	**P.O.R.**
KL-66 (KL-44 with 22" prewash)	66"	700 lbs.	**P.O.R.**

Above models available in any of the following voltages: 208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3.
*When ordering, please specify the direction of operation, voltage and phase.
NOTE: P.O.R. – Price on Request

Rack Conveyor Options

Options

Stainless steel vent cowl with 7" stack and locking dampers	*each*	**P.O.R.**
Stainless steel extended hood with 7" stack and locking dampers	*each*	**P.O.R.**
Table limit switch (unmounted) (recommended on all rack conveyor installations)		**P.O.R.**
Cold water thermostat for prewash section (comes with pressure regulating valve)		**P.O.R.**
Machine insulation (hoods and back panels)	*per inch of machine*	**P.O.R.**
Racks: Peg or flat racks (specify type)	*each*	**P.O.R.**
Vertical clearance through machine: 24"	*per inch of machine*	**P.O.R.**
PR-36 – prewash for: KL-44 and 54-KB (36" length) (Shipping Wt.: 400 lbs./182 kg.)		**P.O.R.**
FF-PR26 – front feed prewash for: KL-44, 44DR, 44DRWS, 64E, 84E (26" length) (Shipping Wt.: 250 lbs./114 kg.)		**P.O.R.**
Blower-dryer including 60" hood, table legs and pawl bar assembly (Shipping Wt.: 600 lbs./273 kg.)		**P.O.R.**
Water pressure regulating valve (unmounted; standard with booster; standard with KL and Water Saver Series)		**P.O.R.**
Steam pressure regulating valve (unmounted)		**P.O.R.**
Dwell switch		**P.O.R.**
Vent fan control		**P.O.R.**
Booster interconnect relay (gas booster only)		**P.O.R.**
Drain water tempering kit (unmounted)		**P.O.R.**

NOTE: P.O.R. – Price on Request

NON STANDARD VOLTAGES: Contact Factory for availability and price. **NOTE:** Options prices apply only when ordered with machine.

Champion® MOYER DIEBEL®
The Dishwashing and Glasswashing Machine Specialists

Rack Conveyor Table Systems

Model MRC 90
90° Motorized
Rack Curve
(Must be ordered with Roller Conveyor Table)

Model MRC 180
180° Motorized
Rack Curve
(Must be ordered with Roller Conveyor Table)

Cantilever Sideloader
(No hood)

Model RCT 64 or RCT 84
Roller
Conveyor Table

Rack Conveyor Table Systems	Approximate Shipping Wt. lbs./kg.	Retail Price (Add GST)
MRC 90 — 90° Motorized Rack Curve (specify load or unload) **(115/60/1 separate connection) (must include Champion Roller Conveyor Table)**	150/66	**P.O.R.**
MRC 180 — 180° Motorized Rack Curve (specify load or unload) **(115/60/1 separate connection) (must include Champion Roller Conveyor Table)**	230/105	**P.O.R.**
RCT 64 — 64" Roller Conveyor Table (mobile or stationary, load or unload)	90/41	**P.O.R.**
RCT 84 — 84" Roller Conveyor Table (mobile or stationary, load or unload)	115/52	**P.O.R.**
Non-standard lengths		**Price on request**
Cantilever Sideloader		
No hood		
24"		**P.O.R.**
30"		**P.O.R.**
With hood		
24"		**P.O.R.**
30"		**P.O.R.**
Extended Pawl Bar (extended drive unit)		**P.O.R.**

NOTE: Consult Factory for booster location when ordering Rack Advance and Roller Tables.
NOTE: P.O.R. – Price on Request

Upright Conveyor (UC) Series

Standard Features

- All-purpose peg belt
- Electric eye energy sentinel (idle pump shut-off)
- Rinse saver
- Choice of tank heat: electric, steam coils or steam injectors
- Control circuit, 120-Volt
- Door safety switches
- Low-water tank heat protection
- Automatic fill
- Easy-to-reach top-mounted control console
- Push-button start-stop station - load end
- Sliding conveyor shut-off shelf – unload end
- Heavy-gauge stainless steel construction
- Stainless steel enclosure panels – front and ends
- Chrome-plated piping (above top of machine)
- Recirculating flushing nozzles – load end
- Common drain
- Circuit breakers for common electric connection (separate for booster and blower-dryer options)
- Vent openings with 7" stainless steel stacks and locking dampers – both ends

General Information

The Champion Upright Conveyor dishwashing machines consist of modular sections: load, prewash, wash-rinse, Eco-rinse and unload. Each section is available in a choice of lengths to provide maximum space, labor and production efficiency.

To accommodate various production levels and ware sizes, select from two (2) conveyor widths.

C Series: 24" wide conveyor belt.

CW Series: 29-1/4"-wide conveyor belt.

W-6 Series: 58" wide conveyor belt .

Sectional Construction	
A	*** LOAD** 3 ft. minimum length. For more loading area, order in 1 ft. increments. * 3 ft. load is of cantilever design
B	**PREWASH** B2 2 ft. prewash with standard external scrap basket and 1 Hp pump motor. B4 4 ft. prewash with optional external scrap basket. 3 Hp pump motor is standard.
C 	**WASH - RINSE** C4 4 ft. wash for C Series (Contact factory for application) C6 6 ft. wash-rinse combination for CW Series C8 8 ft. wash-rinse combination for CW and W-6 Series
E	**ECO-RINSE** E2 2 ft. Water Saver Section (CW Series Only)
D	**UNLOAD** Minimum 5 ft. length (Contact factory for application) Additional length available in 1 ft. increments for greater drying efficiency.

Champion® MOYER DIEBEL®

The Dishwashing and Glasswashing Machine Specialists

Upright Conveyor (UC) Series

MODULAR SECTIONS FOR CW, WS AND W-6 SERIES DISHWASHING MACHINE

LOAD (A)	**3' load** (minimum load section) (3 ft. load section is of cantilever design)	
	Additional lengths available in 1 ft. increments	
PREWASH (B)	**2' prewash**	with external scrap basket (standard)
	4' prewash	without external scrap basket
		with external scrap basket
WASH-RINSE (C)	**4' wash** (contact factory for application)	
		without external scrap basket
		with external scrap basket
	6' wash-rinse combination	
		without external scrap basket
		with external scrap basket on wash and/or rinse
	8' wash-rinse combination	
		without external scrap basket
		with external scrap basket on wash and/or rinse
ECO-RINSE (E)	**2' Water Saver section (for CW Series only)**	
UNLOAD (D)	**5' unload** (5' minimum unload section) (contact factory for application)	
	Additional lengths available in 1 ft. increments	

Approximate Shipping Weight: CW Series – Water Saver Series: 175 lbs. per foot
W-6 Series: 350 lbs. per foot

Standard Tank Heat (specify one)

	Electric heaters with thermostat and positive low-water cut-off
	Closed stainless steel coils with thermostat and positive low-water cut-off
	Steam injectors with thermostat and positive low-water cut-off
NOTE: Booster optional	Built-in steam boosters are available on all unload sections.
	For location of built-in electric boosters, Contact Factory.

For Pricing on Champion Upright Conveyors – Contact Factory

Upright Conveyor (UC) Series

CW, WS and W-6 Series Options

- Back panel, stainless steel
- Belts, All purpose peg belt standard
  Flat belt
  Cup belt
  Insulated tray belt
  Silverware belt
  Belts with upper rods
  BELTS – ANY COMBINATION OF ABOVE
  (Belt with all stainless steel components for Correctional applications – Special Order Only)
- Blower Dryer – must have 9 ft. or greater unload, steam or electric (Weight: 400 lbs.)
- Bumper rail – machine mounted
- Cold water thermostat (for prewash)
- Conveyor, variable speed, electric
- Doors, 1-piece liftout for low ceiling installations
- Doors both sides of hood
- Drain interlock switches
- Insulated hoods, insulated lower panels
- Isolation switches for motor and/or electric tank heat
- Motor, pump, 2 Hp optional in lieu of 1 Hp on 2 ft. prewash
- Motor, pump, 3 Hp optional in lieu of 1 Hp on 2 ft. prewash
- Split unload (D section)
- Start/Stop station, unload end
- Steam pressure regulating valve (unmounted)
- Tray unloader and cart (sample of tray required)
- Unload side rails
- Water pressure regulating valve (mounted) (standard with built-in booster)

CHAMPION STEAM BOOSTER – (Built-in) (Shipping Weight: 75 lbs.)
UC-CW (40°F max. rise)
UC-CW (70°F max. rise)

CHAMPION ELECTRIC BOOSTERS (Built-in) (Shipping Weight: 150 lbs.)
UC-CW (40°F max. rise)
UC-CW (70°F max. rise)

NOTE: Electric boosters – contact Factory for location
Available voltages: 208/60/3; 240/60/3; 480/60/3; 575/60/3
For non-standard voltages, contact Factory

Installation Supervision (Continental U.S. and Canada): Provided by factory authorized personnel at no additional cost for ONE day during regular working hours only. The warranty will begin after factory supervision and approval is completed subject to standard warranty terms.

Allow 2 weeks for scheduling supervision

For Pricing on Champion Upright Conveyors – Contact Factory
NOTE: Options prices apply only when ordered with machine.

Champion® MOYER DIEBEL®

The Dishwashing and Glasswashing Machine Specialists

Pot, Pan and Utensil Machines

Standard Features

- Tank heater (Choice of electric, steam coil or steam injector)
- Low-water tank heat cut-off
- 7.5 Hp drip-proof wash pump motor
- Control circuit, 120-Volt
- Counter-balanced door system
- Detergent/chemical connection provisions
- Door safety switch on each door
- Stainless steel enclosure panels (front and sides)
- Interchangeable upper and lower wash and rinse arms
- Fully-automatic wash and rinse cycle
- External lift-out refuse basket
- Recessed, front-mounted controls
- Integral 6" shelf on front-loading model
- Hold-down grid for light ware protection
- Automatic tank fill
- Vent connection, 6" diameter

Note: When ordering PP-28, specify type and quantity of racks required.

PP-28	Standard Voltages	Approximate Shipping Wt. lbs./kg.	Retail Price (Add GST)
Straight-through, corner or front-loading operation	208/60/3; 230/60/3 480/60/3; 575/60/3	800/364	P.O.R.

Tank Heat (specify one)

Electric heat with thermostat and low-water cut-off	Standard – no charge
Stainless steel closed steam coil with thermostat and low-water cut-off	P.O.R.

Options

Exhaust fan (1/3 Hp)		65/30	P.O.R.
Rack: Bake sheet, stainless steel	(P/N 109587)		P.O.R.
Rack: Basket, stainless steel	(P/N 109584)		P.O.R.
Rack: Counter pan, stainless steel	(P/N 109585)		P.O.R.
Rack: General utility, stainless steel	(P/N 109586)		P.O.R.
Steam pressure regulating valve			P.O.R.
Water pressure regulating valve (unmounted) (Standard with built-in booster)			P.O.R.

Booster Heaters (Shipping Weight: 150 lbs./68 kg.) all prices reflect mounted and piped boosters (PRV included).

Steam (stainless steel)	
40°F rise – built-in (externally mounted with cover on corner models)	P.O.R.
70°F rise – built-in (externally mounted with cover on corner models)	P.O.R.
Electric (stainless steel)	
27 kW (40°F rise built-in) (externally mounted with cover on corner models)	P.O.R.
45 kW (50°F – 70°F rise) (externally mounted with cover on corner models)	P.O.R.

NOTE: Options prices apply only when ordered with machine (otherwise, add 10%). **NOTE:** P.O.R. – Price on Request

Pot, Pan and Utensil Machines

Undercounter Washer	Approximate Shipping Weight lbs./kg.	Suggested List Price
UTC-6	400/182	**16,365**

Options

Steam extraction fan	**P.O.R.**
Single phase wash pump motor	**P.O.R.**
Additional stainless steel wash racks (each)	**P.O.R.**
Stainless steel mesh utensil basket with hinged lid (each)	**P.O.R.**

Utensil Washers	Approximate Shipping Weight lbs./kg.	Electric Tank & Booster Heater	Steam Coils Tank & Booster Heater	*Gas Tank & Booster Heater
UTM-10	**600/293**	**P.O.R.**	**P.O.R.**	**P.O.R.**
LD-10	**600/273**	**P.O.R.**	**P.O.R.**	**–**
SD-10	**800/364**	**P.O.R.**	**P.O.R.**	**P.O.R.**
LD-12-PT	**600/273**	**P.O.R.**	**P.O.R.**	**P.O.R.**
LD-12-CPT	**800/364**	**P.O.R.**	**P.O.R.**	**P.O.R.**
LD-20	**800/364**	**P.O.R.**	**P.O.R.**	**P.O.R.**
SD-20	**800/364**	**P.O.R.**	**P.O.R.**	**P.O.R.**
LD-20-PT	**1200/546**	**P.O.R.**	**P.O.R.**	**P.O.R.**
SD-36	**1200/546**	**P.O.R.**	**P.O.R.**	**P.O.R.**

*All gas heat models have gas booster except UTC-6 and LD-10

Options

Steam extraction fan (all models except LD-20-PT & SD-36)		**P.O.R.**
Steam extraction fan (LD-20-PT & SD-36)		**P.O.R.**
Single phase wash pump motor (UTM-10, LD-10, SD-10)		**P.O.R.**
Single phase wash pump motor (LD-12-PT, LD-12-CPT, LD-20, SD-20)		**P.O.R.**
Automatic drain (all models except LD-10)		**P.O.R.**
Stainless steel pumped rinse system with electric/gas/steam coil booster heater (SD-36)		**P.O.R.**
Utensil rack with hold-down lid		**P.O.R.**
Stainless steel mesh utensil basket with hinged lid (part #0510795)		**P.O.R.**
Molded plastic utensil basket for small items		**P.O.R.**
Stainless steel insert for tray/sheet pans (UTM-10, SD-10, SD-20, SD-36)		**P.O.R.**
Stainless steel insert for muffin/cake pans (UTM-10, SD-10, SD-20, SD-36)		**P.O.R.**
Tray/sheet pan rack (LD-10, LD-12-PT, LD-12-CPT, LD-20, LD-20-PT)		**P.O.R.**
Stainless steel muffin/cake pan rack (LD-10, LD-12-PT, LD-12-CPT, LD-20, LD-20-PT)		**P.O.R.**
575/60/3	(5 HP Motor)	**P.O.R.**
	(7 HP Motor + 10 HP Motor)	**P.O.R.**
	(15 HP Motor)	**P.O.R.**

Champion® MOYER DIEBEL®
The Dishwashing and Glasswashing Machine Specialists

Pot, Pan and Rack Machines

Rack Washers	Approximate Shipping Weight lbs./kg.	Suggested List Price Electric Tank & Booster Heater	Suggested List Price Gas* Tank & Booster Heater	Suggested List Price Steam Injector Tank & Booster Heater
1527-N	2200/1000	**P.O.R.**	**P.O.R.**	**P.O.R.**
1536-N/1536-B	2200/1000	**P.O.R.**	**P.O.R.**	**P.O.R.**
2048	2300/1046	**P.O.R.**	**P.O.R.**	**P.O.R.**
2054	—	**P.O.R.**	**P.O.R.**	**P.O.R.**
3060	—	**P.O.R.**	**P.O.R.**	**P.O.R.**
LD-36	—	**P.O.R.**	**P.O.R.**	**P.O.R.**

*** All Rack Washer Gas heat models have gas boosters.**

Options

Automatic drain	**P.O.R.**
External wash-down hose	**P.O.R.**
Steam extraction fan	**P.O.R.**
Fold away ramp system	**P.O.R.**
Additional pit grid	**P.O.R.**
Water pressure regulator	**P.O.R.**
Rinse tank with steam coil booster heater (N/A to 3060)	**P.O.R.**
Stainless steel pumped rinse system with electric/gas/steam coil booster heater (standard on 3060)	**P.O.R.**
Stainless steel hood assembly	**P.O.R.**
Stainless steel hood assembly with steam extraction fan	**P.O.R.**
Pass through second door and extended cabinet	**P.O.R.**

Roll-in Rack Options (Stainless Steel)

	1527-N	1536-N	2048/2054	3060	LD-36
Tray/sheet pan rack	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**
Pot and utensil rack	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**
Sheet, cake and muffin rack	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**	**N/A**
Tray/sheet and steam table pan rack	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**	**N/A**
Steam table pan rack	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**
Cake pan rack	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**	**P.O.R.**

NOTE: For pot and pan washers listed on pages 18 & 19, specifications and terms will be those in effect at the time of shipment, and prices are subject to change without notice.

Standard Champion Moyer Diebel warranty, terms and conditions apply except freight which is ex. works, Clearwater, Florida. Above models available in any of the following voltages: 208/60/1; 230/60/1; 280/60/3; 230/60/3; 460/60/3; 575/60/3 **NON STANDARD VOLTAGES: Contact Factory for availability and price.**

NOTE: P.O.R. – Price on Request

Power Wash Sink Systems

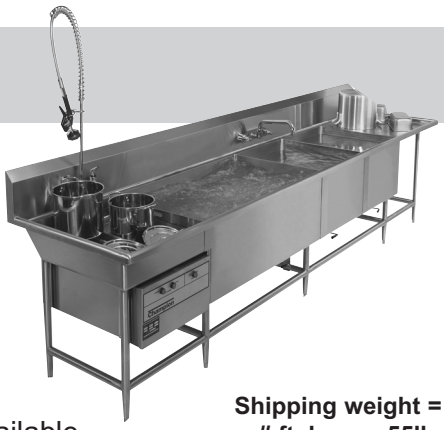

Model PP-3 Taskmaster

The Taskmaster soak sink system is modular in design allowing you to configure the system to your specifications. The wash sink is powered by a 3-Hp pump which creates a turbulent water scrubbing action to all areas of the sink. Constructed of high quality Type 304 stainless steel, the PP-3 is tough, durable and built to last. Start with a wash sink then add table sections and additional compartments for rinsing and sanitizing. Options such as a wash tank heater with low water protection are also available.

Shipping weight = # ft. long x 55lb.

Standard Voltages	Pump/Motor (HP)
208-240V/60/1PH	3
208-240V/60/3PH	3
480V/60/3PH	3

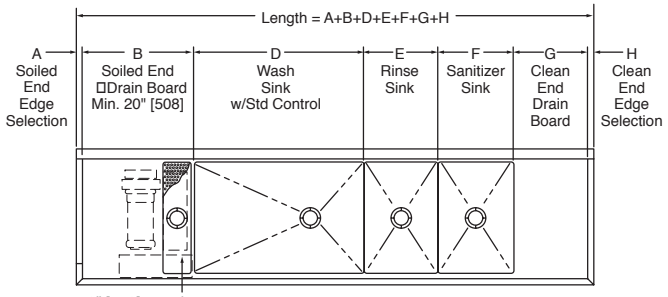
Length = A+B+D+E+F+G+H
A Soiled End Edge Selection
B Soiled End Drain Board Min. 20" [508]
D Wash Sink w/Std Control
E Rinse Sink
F Sanitizer Sink
G Clean End Drain Board
H Clean End Edge Selection
6" [152] trough with 1-1/2" drain standard w/o scrapper table.

PP-3 without Scrapper Table

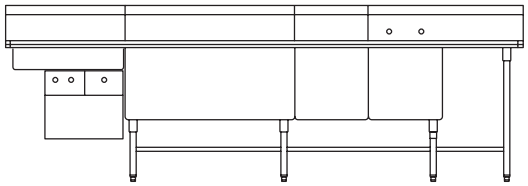

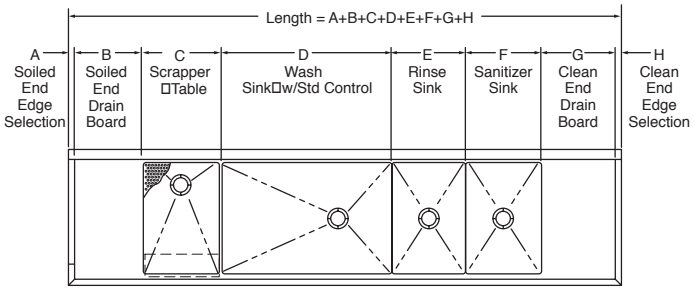
Length = A+B+C+D+E+F+G+H
A Soiled End Edge Selection
B Soiled End Drain Board
C Scrapper Table
D Wash Sink w/Std Control
E Rinse Sink
F Sanitizer Sink
G Clean End Drain Board
H Clean End Edge Selection

PP-3 with Scrapper Table

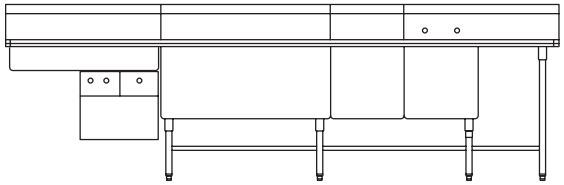

A	Soiled End Edge Selection ☐ hemmed ☐ rolled rim ☐ end splash	**Consult factory for pricing on Power Wash Sink Systems**
B	Soiled End Drain Board (Min. 20" [508] w/o scrapper table) ☐ 12" [305] ☐ 14" [356] ☐ 16" [406] ☐ 18" [457] ☐ 20" [508] ☐ 24" [610] ☐ 30" [762] ☐ 36" [914] ☐ 42" [1067] ☐ 48" [1219] ☐ 54" [1372] ☐ 60" [1524]	
C	Scrapper Table ☐ 24" [610] w/full screen ☐ 36" [914] w/sub-sink and screen ☐ 42" [1067] w/sub-sink and screen	
D	Wash Sink with Standard Control ☐ 36" [914] ☐ 42" [1067] ☐ 48" [1219] ☐ 54" [1372] ☐ 60" [1524]	
E	Rinse Sink ☐ 16" [406] ☐ 18" [457] ☐ 20" [508] ☐ 24" [610] ☐ 30" [762] ☐ 36" [914]	
F	Sanitizer Sink ☐ 16" [406] ☐ 18" [457] ☐ 20" [508] ☐ 24" [610] ☐ 30" [762] ☐ 36" [914]	
G	Clean End Drainboard ☐ 12" [305] ☐ 14" [356] ☐ 16" [406] ☐ 18" [457] ☐ 20" [508] ☐ 24" [610] ☐ 30" [762] ☐ 36" [914] ☐ 42" [1067] ☐ 48" [1219] ☐ 54" [1372] ☐ 60" [1524]	
H	Clean End Edge Selection ☐ hemmed ☐ rolled rim ☐ end splash	
OPTIONS	Other Options: ☐ ¾" mixing faucet ☐ Tray Holder ☐ ½" pre-rinse sprayer ☐ Overshelves ☐ 3 kW Tank heater ☐ Utensil Basket ☐ Scrapper Table ☐ Auto-shutdown timer with disposer	

Consult factory for pricing on Power Wash Sink Systems

Champion® MOYER DIEBEL®
The Dishwashing and Glasswashing Machine Specialists

Circular Conveyor CC Series

The complete warehandling system!

The Circular Conveyor offers high-volume operators a choice of continuous dish rack or direct loading conveyor belts. Custom designed for specific applications, this system is available in high or low temperature models and with a complete line of deluxe options, such as sinks, troughs, disposers, overhead shelves, insulated hoods, a space-saving prewash unit on the radius, and a 24-inch vertical clearance to accommodate large trays. The access doors may be located on the inside or outside of the circle. 200 to 331 racks per hour (NSF rated).

Installation Supervision (Continental U.S., and Canada): Provided by factory authorized personnel at no additional cost of one day during regular working hours only. The warranty will begin after factory supervision and approval of final installation is completed subject to standard warranty terms. **Consult Factory for pricing on Champion CC Machines.**

Tray Dryer

		Approximate Shipping Wt. lbs./kg.	Retail Price (Add GST)
CTD-1800H	Horizontal Tray Dryer for Standard Cafeteria Trays (Sample Tray Required)	800/364	**P.O.R.**

NOTE: P.O.R. - Price On Request

Waste Handling Systems

P5-24 Features: 24” slurry chamber top cover with integral loading trough, and interconnecting water extractor and remote control panel.

P5-30/P7-30 Features: 30” slurry chamber, trough connection, interconnecting water extractor with flushing system deodorizer injector and remote control panel.

(Model P5-24 shown)

Available voltages:
208V/60/3; 240V/60/3; 480V/60/3

Model		Approximate Shipping Wt. lbs./kg.	Suggested List Price F.O.B. Factory
P5-24	**(5 HP)**	1000/455	**P.O.R.**
P5-30	**(5 HP)**	1000/455	**P.O.R.**
P7-30	**(7.5 HP)**	1100/500	**P.O.R.**
Options			
Recirculating Pump		100/45	**P.O.R.**
Trough Connection		50/23	**P.O.R.**
Extractor flushing system		N/A	**P.O.R.**
Hose Reel (30 ft.) (unmounted)		44/20	**P.O.R.**
Automatic Shut-down Timer		10/5	**P.O.R.**
Deodorizer Injector		N/A	**P.O.R.**
Remote Start-Stop Station (unmounted)		N/A	**P.O.R.**
Sound Insulated Panels		—	**P.O.R.**

TERMS & CONDITIONS OF SALE

1. TERMS. Moyer Diebel, Inc. is referred to herein as "Seller." The purchaser of the property subject hereto ("Property") is referred to as "Buyer."

No terms or conditions other than those stated herein shall be applicable to the state of the Property unless incorporated as part of the order or quotation constituting a part of the Purchase Agreement described below. The Laws of the Province of Ontario will govern this Agreement and all transactions hereunder as to interpretation, enforce-ment, validity, construction, effect and in all other respects.

2. PURCHASE AGREEMENT. Any order for or offer to purchase the Property shall not be binding on the Seller unless it is accepted in writing by the Seller's acknowledgment reflecting such acceptance. When so accepted it shall be binding in accordance with the Terms and Conditions of Sale. No modifications shall be permitted unless agreed to in writing by the parties. Unless otherwise specifically agreed in writing, any delivery or shipping date shown, or mentioned by the Seller, is furnished only for the convenience of the Buyer, is estimated, and is not a date by which the Seller has agreed to ship or deliver the Property.

Change orders for the Property will not be permitted without the Seller's consent. The Seller may impose a charge in connection with any change order that the Seller accepts.

Each shipment or delivery is subject to Seller's approval of Buyer's creditworthiness including, without limitation, determination that Buyer is not in default on any obligation to Seller.

3. PRICES. Unless otherwise agreed: (i) all prices will be F.O.B. Destination, (ii) and all sales are subject to the terms and pricing of the applicable policy in effect on the date that the order for the Property is shipped. All invoices not paid within 30 days of the date of their issue shall be subject to a delinquency charge of 18% per annum, state equivalent sales per annum (.0041095% per day), or such lesser amount as may be the maximum rate permitted by law. Buyer agrees to pay all costs of collection including such reasonable attorneys' fees as may be allowed by law.

4. DELIVERY. If a delivery is F.O.B., shipment of the Property will be in accordance with Buyer's instructions. In the absence of shipping instructions on F.O.B. deliveries, Seller may ship by such method or carrier as Seller may deem reasonable. The risk of loss for Property shall pass to the Buyer upon delivery of the Property to the Buyer or a public carrier.

The Seller shall not be liable for failure or delay in the delivery of the Property as a result in whole or in part, of fire, flood, tornado, hurricane or other acts of God; because of any casualty, accident, embargo, strike, lockout, work stoppage, war or government regulation; or for any other reason beyond the Seller's reasonable control including, but not limited to, late delivery, or nondelivery, of any part or component of the Property that is the subject thereof.

5. DISCLAIMER OF WARRANTIES AND LIMITATIONS OF DAMAGES. THE PROPERTY IS WARRANTED ONLY TO THE EXTENT REFLECTED N THE SEPARATE MANUFACTURER'S LIMITED WARRANTY APPLICABLE THERETO, THE SELLER MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY, OR FITNESS OF PURPOSE. THE SELLER SHALL NOT BE LIABLE TO BUYER FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. In case of a breach by the Seller, the Buyer's exclusive remedy shall be, at the Seller's option, repair or replacement, or the return of the Property to the Seller and refund to the Buyer of the purchase price. In no event shall the Seller's liability exceed the contract price of the Property.

6. ORDER CANCELLATION AND RETURN. Buyer acknowledges that the Seller will have incurred costs in connection with the sale of the Property; that the Property is produced by the Seller as required pursuant to confirmed orders, that Buyer's failure to accept delivery of Property as to which Seller has given its acceptance will result in damage to the Seller which may be difficult to ascertain; and that liquidation damages as follows are reasonable and will be paid by Buyer if Property is not purchased:

(a) As to standard machines, the Buyer will pay the Seller, as liquidated damages, 25% of the agreed price of the Property.

(b) As to all other machines, the Buyer will pay the Seller, as liquidated damages, the following percentages of the agreed price of the Property:

i. 25% of the agreed price upon cancellation before production of the machine begins,

ii. 35% of the agreed price after production of the machine begins, and before the machine is substantially completed, and

iii. 50% of the agreed price after substantial completion of the machine.

7. DISPUTE RESOLUTION. Any unresolved dispute arising in connection herein shall be resolved by arbitration in Toronto, Ontario, under the rules of the Arbitration Act, (Ontario).

8. GENERAL PROVISIONS. The sale of the Property herein identified shall be governed by the law of Ontario. Failure or delay of the Seller in exercising any right, power or privilege shall not operate as a waiver of any such right, power or privilege. If any portion of these Terms and Conditions of Sale shall be held to be invalid or unenforceable, all other provisions shall nevertheless remain valid and enforceable in accordance with their terms.

LIMITED WARRANTY

Champion Moyer Diebel (herein referred to as Moyer Diebel, 2674 North Service Road, Jordan Station, Ontario, L0R 1S0) warrants machines, and parts, as set out below.

Warranty of Machines: Moyer Diebel warrants all new machines of its manufacture bearing the name Champion and/or Moyer Diebel and installed within Canada to be free from defects in material and workman-ship for a period of one (1) year after the date of installation or fifteen (15) months after the date of shipment by Moyer Diebel, whichever occurs first. The warranty registration card must be returned to Moyer Diebel within ten (10) days after installation. If warranty card is not returned to Moyer Diebel within such period, the warranty will expire after one year from the date of shipment. Moyer Diebel will not assume any responsibility for extra costs for installation in any area where there are jurisdictional problems with local trades or unions.

If a defect in workmanship or material is found to exist within the warranty period, Moyer Diebel, at its election, will either repair or replace the defective machine or accept return of the machine for full credit. In the event that Moyer Diebel elects to repair, the labor and work to be performed in connection with the warranty shall be done during regular working hours by a Moyer Diebel authorized service technician. Defective parts become the property of Moyer Diebel. Use of replacement parts not authorized by Moyer Diebel will relieve Moyer Diebel of all liability in connection with its warranty. In no event will Moyer Diebel's warranty obligation exceed Moyer Diebel's charge for the machine.

The following are not covered by Moyer Diebel's warranty:

a. Lighting of gas pilots or burners.
b. Cleaning of gas lines.
c. Replacement of fuses or resetting of overload breakers.
d. Adjustment of thermostats.
e. Adjustment of clutches.
f. Opening or closing of utility supply valves or switching of electrical supply current.
g. Cleaning of valves, strainers, screens, nozzles, or spray pipes.
h. Performance of regular maintenance and cleaning as outlined in operator's guide.
i. Damages resulting from water conditions, accidents, alterations, improper use, abuse, tampering, improper installation, or failure to follow maintenance and operation procedures.
j. Wear on Pulper cutter blocks, pulse vanes, and auger brush.

Examples of the defects not covered by warranty include, but are not limited to: (1) Damage to the exterior or interior finish as a result of the above, (2) Use with utility service other than that designated on the rating plate, (3) Improper connection to utility service, (4) Inadequate or excessive water pressure, (5) Corrosion from chemicals dispensed in excess of recommended concentrations, (6) Failure of electrical components due to connection of chemical dispensing equipment installed by others, (7) Leaks or damage resulting from such leaks caused by the installer, including those at machine table connections or by connection of chemical dispensing equipment installed by others, (8) Failure to comply with local building codes, (9) Damage caused by labor dispute.

Warranty of Parts: Moyer Diebel warrants all new machine parts produced or authorized by Moyer Diebel to be free from defects in material and workmanship for a period of 90 days from date of invoice. If any defect in material and workmanship is found to exist within the warranty period, Moyer Diebel will replace the defective part without charge.

DISCLAIMER OF WARRANTIES AND LIMITATIONS OF LIABILITY. MOYER DIEBEL'S WARRANTY IS ONLY TO THE EXTENT REFLECTED ABOVE. MOYER DIEBEL MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY, OR FITNESS OF PURPOSE. MOYER DIEBEL SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. THE REMEDIES SET OUT ABOVE ARE THE EXCLUSIVE REMEDIES FOR ANY DEFECTS FOUND TO EXIST IN MOYER DIEBEL DISHWASHING MACHINES AND MOYER DIEBEL PARTS, AND ALL OTHER REMEDIES ARE EXCLUDED, INCLUDING ANY LIABILITY FOR INCIDENTALS OR CONSEQUENTIAL DAMAGES.

Moyer Diebel does not authorize any other person, including persons who deal in Moyer Diebel dishwashing machines, to change this warranty or create any other obligation in connection with Moyer Diebel dishwashing machines.

Champion®

MOYER DIEBEL®

The Dishwashing and Glasswashing Machine Specialists